Publication No. 9B8816
January 1997

SITE SPECIFICATIONS
for the
Kodak AUTOMIXER III PLUS

Kodak Home Page on Internet

Tech Bulletin on Intranet

Table of Contents

© Eastman Kodak Company

PLEASE NOTE The information contained herein is based on the experience and knowledge relating to the subject matter gained by Eastman Kodak Company prior to publication.

No patent license is granted by this information.

Eastman Kodak Company reserves the right to change this information without notice, and makes no warranty, express or implied, with respect to this information. Kodak shall not be liable for any loss or damage, including consequential or special damages, resulting from any use of this information, even if loss or damage is caused by Kodak's negligence or other fault.

Warning

To avoid hazardous conditions, keep floors and floor coverings around your *Kodak X-Omat* Processors and associated drains clean and dry at all times. Any accumulation of fluids from mixing tanks, drain lines, etc, should be cleaned up immediately. In the event of an accumulation of liquid due to backup, overflow, or other malfunctions of the drain associated with your *Kodak X-Omat* Processor, call a plumber or other contractor to correct any problem with the drain. Kodak accepts no responsibility or liability whatsoever for the serviceability of any drain connected to or associated with a *Kodak X-Omat* Processor. Such drains are the sole responsibility of the customer.

Important

Use this publication along with the Site Specifications for the *Kodak X-Omat* 270 RA Processor.

Table of Contents

Description	Page
Dimensions and Weights	3
Through-the-Wall Dimensions	5
Electrical Requirements	8
Water and Drain Requirements	9
Water Supply	9
Drain	9
Warranty	10
Publication History	11

Section 1: Dimensions and Weights

Receiving-End and Side View

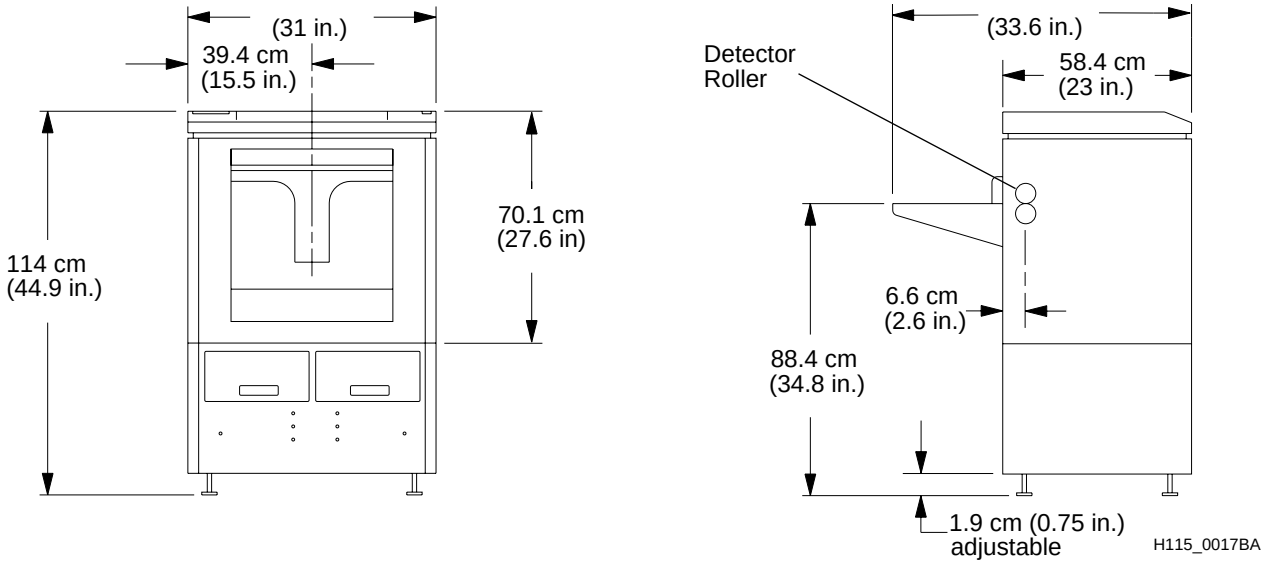

Dimensions and Weights

Description	Crated	Uncrated
Length	71.1 cm (28.0 in.)	58.4 cm (23.0 in.)
Width	87.6 cm (34.5 in.)	78.7 cm (31.0 in.)
Height	71.8 cm (28.3 in.)	43.9 cm (17.3 in.)
Weight (empty)	54.5 kg (120.0 lb)	33.6 kg (74 lb)
Weight (with solutions)	-	84.4 kg (186 lb)

Feed-End View

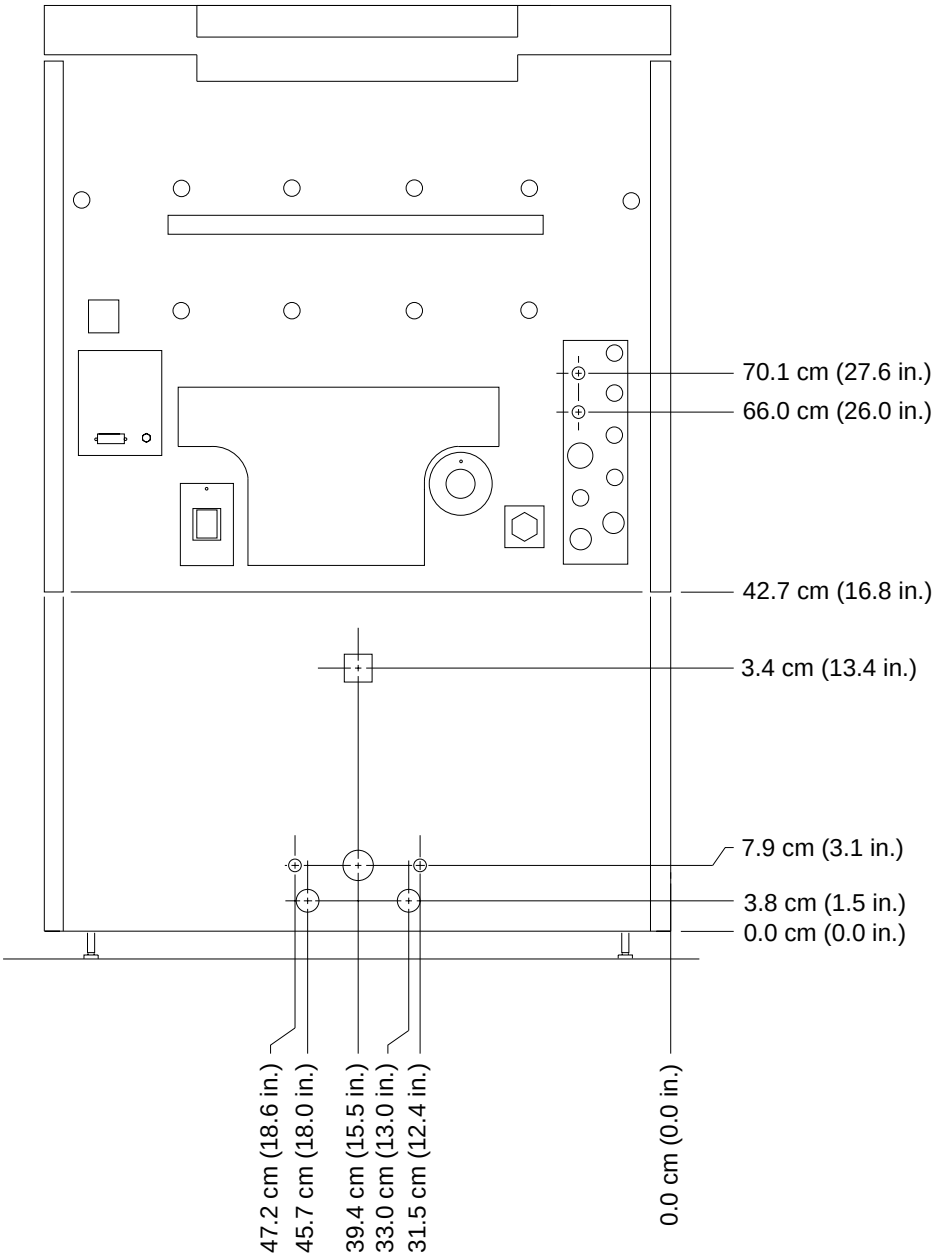

Section 2: Through-the-Wall Dimensions

Through-the-Wall Dimensions, View 1

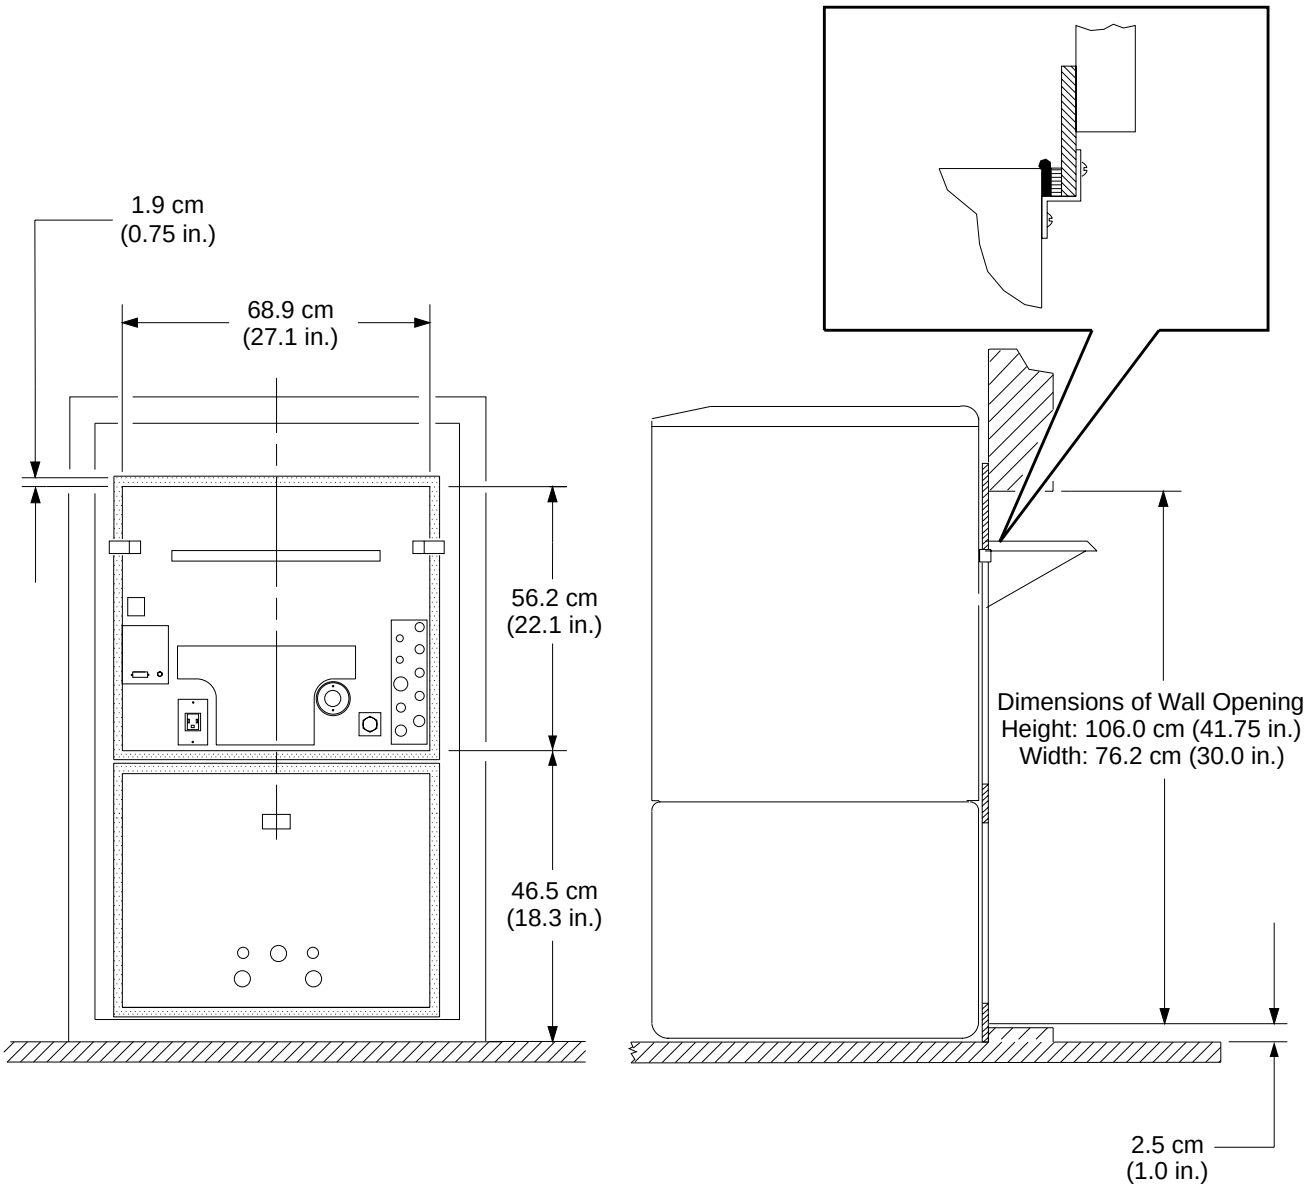

H115_0021DA

Through-the-Wall Dimensions, View 2

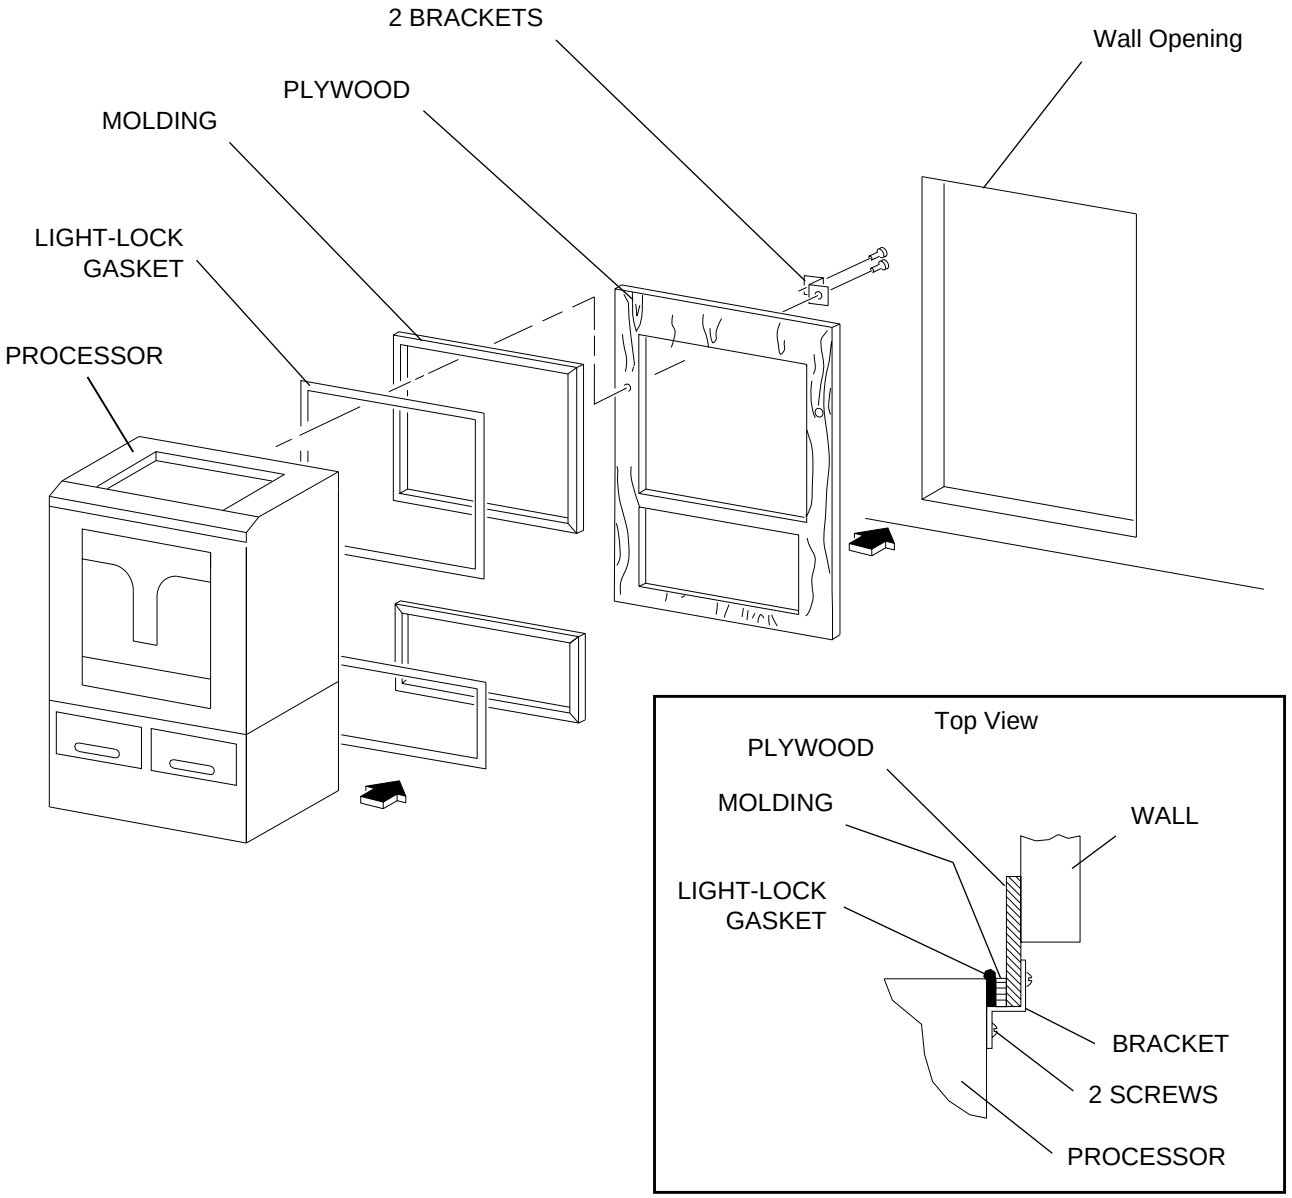

H115_0070DCA
H115_0070DA

Note

See Page 7 for the dimensions of the PLYWOOD.

Dimensions of the Plywood

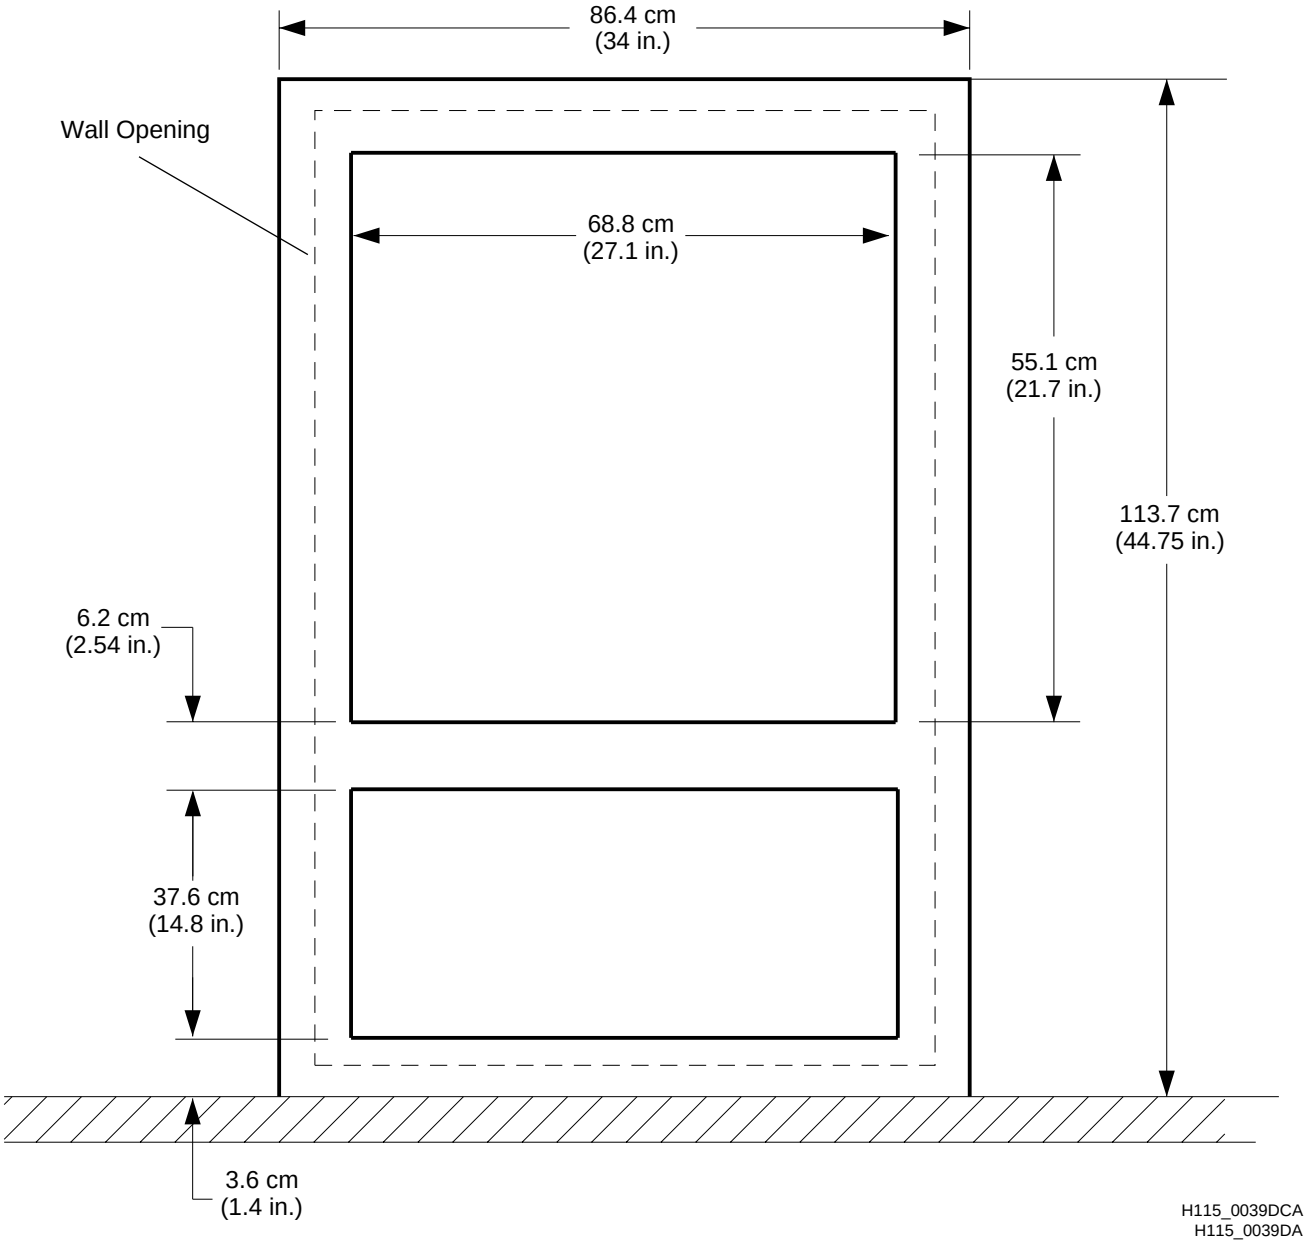

Dimensions of the wall opening:

Height:	106.0 cm (41.75 in.) from 2.5 cm (1.0 in.) above the floor
Width:	76.2 cm (30.0 in.)

Section 3: Electrical Requirements

Agency Listings

- UL Listed to Standard #122
- CSA Certified to Standard C22.2 No. 950-M89
- TUV Licensed to EN 60950

Basic Requirements:

- 100 V AC to 240 V AC, 50/60 Hz - 2 Power Cords, 1.22 mm (4 ft), are provided.
- Amperage - 1 Amp
- **Note -** An internal switching Power Supply will provide 12 V DC with any power input from 100 V AC to 240 V AC.

Section 4: Water and Drain Requirements

Water Supply

Pressure:	172 to 448 kPa (25 to 65 psi); install a regulator if required.
Filtration:	A 50 micron filter is required (not supplied by Kodak) in the input water line.
Connection:	Normal Hose Bib connection.
Air Gap:	A 3.5 cm (1.2 in.) air gap is provided for anti-siphon protection.

Drain

Warning

- A Floor Drain is a requirement.
- Drains must be made of chemically resistant, non-corrosive material. Use PVC or the equivalent.
- The Drain must have a minimum diameter of 7.6 cm (3 in.) and be free of obstruction.
- Drain service must comply with all local codes.

Section 5: Warranty

Kodak warrants this *Kodak* AUTOMIXER III PLUS to function correctly for one year from the date of initial installation, when installed within one year from date of shipment.

Warranty Repair Coverage

If this equipment does not function correctly during the warranty period, the dealer (for the *Kodak* AUTOMIXER III PLUS) who sold the equipment will provide or arrange for repair of the equipment during the dealer's normal working hours. Such repair service will include any adjustments and/or replacement of parts required to maintain your equipment in good working order.

How To Obtain Service

Should equipment require service, refer to the sales contract for details on whom to call for service, or contact the dealer (for the *Kodak* AUTOMIXER III PLUS) who sold the equipment.

Limitations

Warranty service is limited to the contiguous United States, the island of Oahu in Hawaii, and certain areas of Alaska.

This warranty does not cover-

- circumstances beyond the control of Kodak,
- misuse,
- abuse,
- attachments,
- accessories,
- alterations not marketed by Kodak (including service or parts to correct problems resulting from the use of such attachments, accessories, or alterations),
- failure to follow the operating instructions as recommended by Kodak,
- supply items.

Kodak makes no other warranties, express or implied, for this equipment.

Repair without charge is the only obligation of both Kodak and the dealer under this warranty. **Kodak will not be responsible for any consequential or incidental damages resulting from the sale, use, or incorrect functioning of this equipment, even if loss or damage is caused by the negligence or other fault of Kodak.** Such damages for which Kodak **will not** be responsible, include, but are not limited to, loss of revenue or profit, downtime costs, loss of use of the equipment, cost of any substitute equipment, facilities or services or claims of your customers for such damages.

This limitation of liability will not apply to claims for injury to persons or damage to property caused by the sole negligence or fault of Kodak or by persons under its direction or control.

Section 6: Publication History

Print Date	Pub. No.	Affected Pages	File Name	Notes
January 1997	9B8816	All	ss3402_1.doc	First Printing

Kodak and *X-Omat* are trademarks.

ss3402_1.fm

Printed In USA

GLOBAL CUSTOMER SERVICE AND SUPPORT

EASTMAN KODAK COMPANY ● ROCHESTER, N.Y. 14650